

# QM7500

# 7500

## The QM7500 Makes Coding Applications Simple.



### ► Large Character Printing. Compact Design.


MSSC QM7500 Inkjet Printers feature a compact single-line ink jet system that can be quickly installed, programmed and printing in minutes. With high ink mileage and low-maintenance requirements, this hard-working printer, designed specifically for porous surfaces, offers reliable high performance at an economical price.

#### **QM7500 Inkjet Printers feature:**

- 7 x 5 dot matrix printing featuring 54 printable ASCII characters
- Shift organizer allows for automatic coding by up to four specific shifts
- Simple to adjust character width and consecutive incremental numbering

## Additional Features:

- Easily customizable times, dates, and codes
- Expiration date for automatic printing of up to two distinct dates of expiration
- Includes Julian date and rollover hour
- Printable multi-lingual options include: English, Dutch, Finnish, French, German, Italian, Portuguese, Spanish, Swedish, Hebrew, Cyrillic, Greek (special application units include Arabic and Chinese)
- Internally regulated ink system requires no adjustment

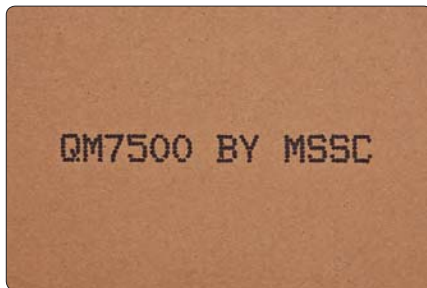

Porous print

### System Includes

- Controller/input device; print head; universal power supply; mounting bracketry and starter ink and solvent kit

### Built-in Software Features

- Customized time and date codes
- Julian date
- Rollover hour
- Expiration date for automatic printing of up to two distinct dates of expiration
- Shift organizer for automatic coding by particular shifts (up to 4 shifts)
- Print delay for message placement
- Character width adjustment
- Consecutive incremental numbering

### Selectable Languages (Built-In)

- Dutch, English, Finnish, French, German, Italian, Portuguese, Spanish, Swedish, Hebrew, Cyrillic, Greek
- Special application units include: Arabic, Chinese
- All characters and accents unique to these languages are printable

### Print Heights

- Standard print height: 0.375 in (10 mm)
- Optional heights: 0.3125, 0.5 and 0.75 in (7, 15 and 20 mm)

### Character Fonts

- 7x5 dot matrix, 54 printable ASCII characters
- Printable accented characters

### Ink Consumption

- Average 120,000 characters per cartridge

### Conveyor Line Speed

- 20 ft/min (6.1 m/min) to 200 ft/min (61.0 m/min)

### Message Length

- Up to 40 characters

### Message Storage Capacity

- Up to 52 messages

### Operating Temperature Range

- 40° F to 120° F (4° C to 49° C)

### Electrical

- System uses universal switching power supply

### Ink System

- Internally regulated ink system
- Factory set
- No adjustment necessary

### Ink

- 8 oz (0.23 liter) bladder pressurized, non-aerosol ink bottles
- Applications, porous surfaces only

### Shipping Weight

- 14 lbs (6.4 kg)

### Mounting Bracketry

- 15 and 9 in (38.9 and 22.8 cm) mounting tubes with 1 in (2.54 cm) outside diameter (OD) includes 2 hand levers for simple up/down and in/out adjustments

### Optional Bracketry for Special Installations

- Long reach bracket kit available for special mounting situations
- Remote bracket assembly kit enables print head to be mounted up to 20 ft (6.1 m) from controller



*The choice is simple.*

For more information on QM7500 Printers, visit [www.mssclic.com](http://www.mssclic.com) or call (800) 854.8905.

Scan for more info

